

VIZZ TACTICAL & VIZZ TACTICAL MPLS LED HEADLAMP



Operating and Maintenance Instructions
Notice d'utilisation et d'entretien
Bedienungsanleitung

ENGLISH:

Battery Installation - See Figure 1

- 3 AAA
- Alkaline (LR03)
 - Lithium (LR2)
 - Rechargeable NiCad or NiMH

Princeton Tec cares about the environment and recommends recycling batteries. For more information about battery recycling, please go to www.batteryrecycling.com.

Observe proper battery polarity. Improper installation of the batteries will damage the light and void the warranty.

WARNING ⚠

- Never mix fresh and used batteries.
- Never mix different battery brands or chemistry types
- Always remove drained batteries immediately.
- Remove batteries during long periods of storage.

NOTE: Lithium batteries offer extended constant brightness time, extreme cold weather performance, and lighter weight. Rechargeable NiCad or NiMH batteries may result in reduced brightness due to lower nominal voltage.

The Vizz battery compartment has a waterproof seal. It is important to keep this seal free from dirt and away from harsh chemicals in order to preserve waterproof integrity. Inspect the seal every time batteries are changed. If dirt is present, wipe gently with a damp cotton swab and mild soap until dirt is removed.

Switch Operation - See Figure 2

From off:

One press: red LED.

Double press: green LED.

Triple press: blue LED.

Note: color mode is user configurable. See "Configuring Color Mode" below.

Two second press: IR

Five second hold: lock or unlock the headlamp

From any visible color mode (red, green, blue) a two second hold turns on the white Maxbright LED at high output. From this state, releasing then holding the button initiates dimming of the white mode.

From any mode, a single press of the button turns the headlamp off.

Removal and replacement of batteries will also reset Vizz to unlocked state.

Configuring Color Mode

Eight second hold: enter/leave programming mode

Note: The selected initial color mode flashes during programming. Default order: red > green > blue. Each button press advances to the next mode. Leaving the programming mode via eight second press sets active mode to turn on with one button press.

Troubleshooting

If the Vizz fails to light:

- Check the batteries for proper installation.
- Replace batteries if proper installation is confirmed.
- Check circuit board for water (the seal may have been compromised by improper rear cover installation or dirty seal). The light will resume normal operation once the water is shaken or blown out and the light is left open until completely dry. If the light has been contaminated with salt water, flush the unit with fresh water and dry as described above.

Vizz Tactical MPLS Accessories

To attach the Vizz Tactical MPLS to the NVG Shroud:

1. Slide the bracket arm into the NVG Shroud adapter plate, making sure the pull tab is above the lip of the adapter plate and that the male grooves on the bottom of the bracket arm are aligned inside the female grooves on the bottom of the adapter plate.
2. Push the bracket arm securely into place, ensuring that the pull tab audibly clicks over the lip of the NVG Shroud adapter plate.
3. Your MPLS Headlamp should now be secured in the NVG Shroud. You can rotate the headlamp to focus your light source accordingly.

Figure 1 - Battery Replacement - Vizz Tactical, Vizz Tactical MPLS

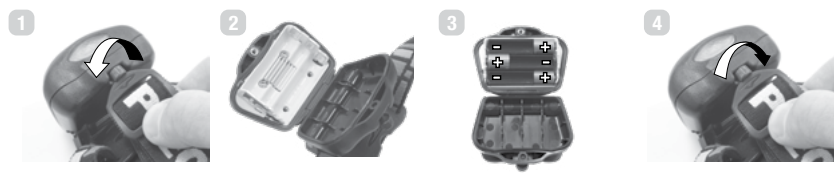



Figure 2 - Switch Operation - Vizz Tactical, Vizz Tactical MPLS

SINGLE PRESS RED ULTRABRIGHT LED (default)		From any visible color mode	2 SECOND HOLD WHITE ULTRABRIGHT LED	
DOUBLE PRESS GREEN ULTRABRIGHT LED (default)		From white Maxbright mode	HOLD Dimming	
TRIPLE PRESS BLUE ULTRABRIGHT LED (default)		From any mode	SINGLE PRESS OFF	
From Off		2 SECOND HOLD IR		
		5 SECOND HOLD LOCK / UNLOCK 3 flashes indicate lock / unlock		

Figure 3 - Program - Vizz Tactical, Vizz Tactical MPLS

8 SECOND HOLD ENTER PROGRAMMING MODE		PRESS SELECT COLOR MODE selected color flashes rapidly	
8 SECOND HOLD EXIT PROGRAMMING MODE			

Figure 4 - Mounting System - Vizz Tactical MPLS

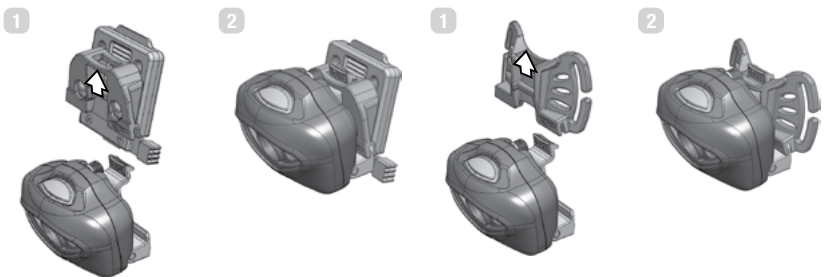

To remove the MPLS headlamp from the NVG Shroud:

1. Remove the NVG Mount from your helmet.
2. Push up slightly on the bottom of the light housing.
3. While pushing upward, use the tool on the provided headstrap to press the tab of the arm bracket towards the headlamp housing, so that it disengages from the NVG Shroud adapter plate.
4. Slide the headlamp unit out of the NVG Shroud adapter plate.

To attach the MPLS Headlamp to the Butterfly Mount:

1. Slide the bracket arm into the Butterfly Mount, making sure the pull tab is above the lip of the mount and that the male grooves on the bottom of the bracket arm are aligned inside the female grooves on the bottom of the mount.
2. Push the bracket arm securely into place, ensuring that the pull tab audibly clicks over the lip of the Butterfly Mount.
3. Your MPLS Headlamp should now be secured in the Butterfly Mount. The mount can be attached to the provided headstrap, MOLLE straps, or any 1" webbing. You can rotate the headlamp to focus your light source accordingly.

To remove the MPLS headlamp from the Butterfly Mount:

1. Push up slightly on the bottom of the light housing.
2. While pushing upward, use the tool on the provided headstrap to press the tab of the arm bracket towards the headlamp housing, so that it disengages from the Butterfly Mount.
3. Slide the headlamp unit out of the Butterfly Mount.

USA Lifetime Warranty - International 10-Year Warranty

Due to international regulations, Princeton Tec's lifetime warranty can only be offered to customers in the USA. Princeton Tec offers a 10-year warranty to our customers outside the USA. FULL WARRANTY - Princeton Tec warrants this product to be free from defects in workmanship and materials under normal use for as long as you own this product. This warranty covers all of the component parts of the product except batteries. This warranty does not cover deterioration due to normal wear or damage due to misuse, alteration, negligence, accidents, or unauthorized repair. Princeton Tec will repair or replace parts which are defective in workmanship or materials. Your authorized Princeton Tec Dealer and

Princeton Tec are the only facilities authorized to repair the product. After (3) unsuccessful attempts to repair the product, you have the right to elect replacement of the product or a refund of the purchase price less allowance for use of the product. NO INCIDENTAL OR CONSEQUENTIAL DAMAGES ARE INCLUDED IN THIS WARRANTY. (Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitations or exclusions may not apply to you.) This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

Princeton Tec reserves the right to change product specifications without notice.

FOR CALIFORNIA RESIDENTS:

WARNING: This product contains Bisphenol A (BpA) a chemical known to the State of California to cause birth defects or other reproductive harm.

Return Policy

If your light fails to operate, follow these simple steps:

1. Check batteries. Replace if necessary.
2. To send your light in for repair or replacement, first contact Princeton Tec customer service on **1-800-257-9080** to request an RMA number. Please have your light model, date of purchase and a brief description of the fault you are experiencing. No warranty repairs will be accepted without an RMA number.
3. Return the light without batteries to: **Princeton Tec, PO Box 8057 Trenton NJ 08650**. Postage due and freight collect items will not be accepted.
4. Upon receipt your light will be processed in about two weeks. Please allow additional time for return transportation from NJ.

Princeton Tec
PO Box 8057,
Trenton, NJ 08650
Phone: 609-298-9331
Fax: 609-298-9601
princetontec.com
© 2018 Princeton Tec

